


Audio Electronics and Systems

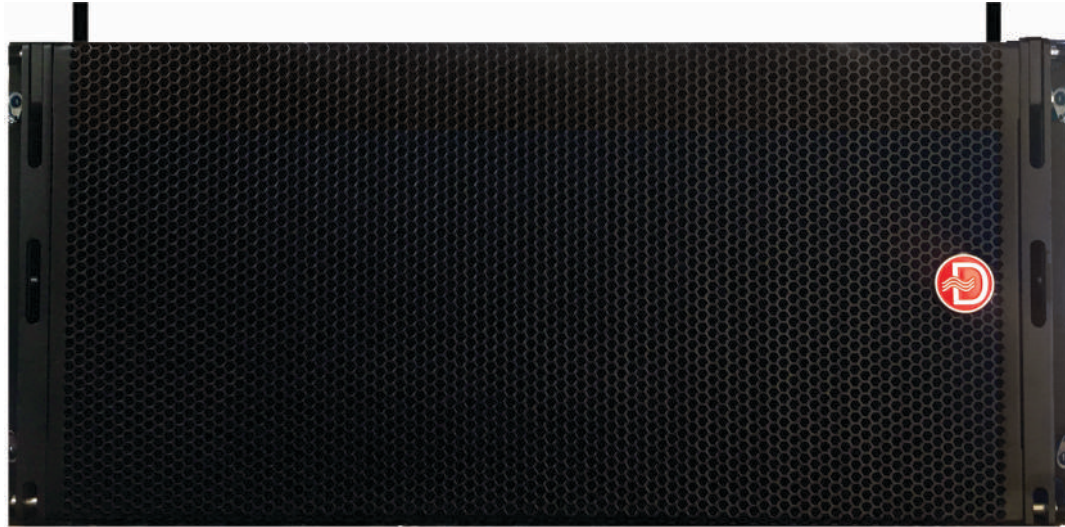

DLA-212A

With everything made **Active**, you can stop worrying about amplification, equalization and protection. Featuring **FiR brick wall filters**, **3-way box design** and **Pascal amplification from Denmark** with the most precise compressors and limiters to protect your drivers.

Specifications

Configuration	Active
Rated Power	1500W (RMS)
Construction	18mm multilayered Plywood
LF Driver	2 × 12", 3"VC, Ferrite Magnet
HF Driver	2 × 1.4" exit, 1.75"VC, Ferrite Magnet
Frequency Response (-3dB)	50Hz - 18kHz
Maximum Peak Output	136 dB
Dispersion (H × V)	120° × 15°
Crossover	Triamped, 1kHz brickwall filter
Packaging Dimensions (L×B×H)(cms)	80 × 73 × 86 (2 pcs)
Net Weight	43 kgs
Gross Weight	140 kgs (2 pcs)