





Frequency Response

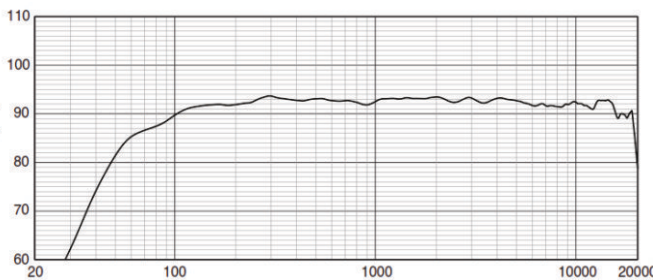

Dimensions

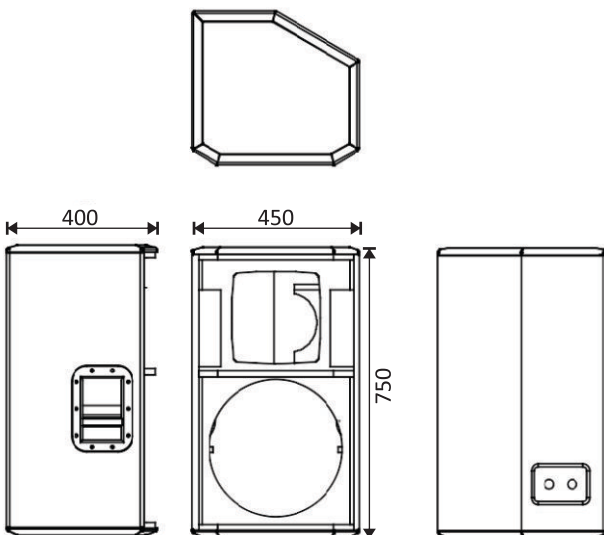

DVX-125

Product Description

Portable and installed PA loudspeakers used in applications including sound reinforcement in Houses of Worship, Events, Clubs, Rehearsal Halls and Ballrooms etc. The DVX series deliver extraordinary performance at unmatched value.

Applications

Houses of Worship, Rehearsal Halls, Events, Clubs, Ballrooms

Features

- High Output SPL and Sensitivity
- High Power low frequency transducer
- Multi purpose cabinet design
- Use as a main system with or without sub speaker

Specifications

Rated Power	600W (RMS)
Construction	18mm multilayered Plywood
LF Driver	1 × 15", 4"VC, Ferrite Magnet
HF Driver	1 × 1.4" exit, 3"VC, Ferrite Magnet
Crossover	1.8 kHz
Frequency Response (-3dB)	50 Hz - 20 kHz
Maximum Peak Output	136 dB
Rated Impedance	8Ω
Dispersion (H × V)	60° × 40°
Connector	2 × NL4R Speakon
Packaging Dimensions (L×B×H)(cms)	52 × 47 × 85
Net Weight	30 kgs
Gross Weight	32 kgs