

## Applications

### COMPACT 4.4

The Compact 4.4 is a very small format system designed for use where ever space is restricted or size requirements are limited. Like all Compact Systems designs, the 4.4 is shipped with an external “U” bracket for easy and flexible installation. Because the 4.4 also incorporates switchable low z or high z operation the Compact 4.4 can be used in a wide variety of foreground/background installation applications.

The system features a switchable low impedance or high impedance design. The low Z configuration is an 8 ohm nominal impedance. The high Z configuration provides an industry standard 100Vrms fully isolated transformer. There are 3 available taps: 35 watts; 25 watts; and 15 watts. System power handling is a full 50 watts and the high sensitivity of 85dB (1 watt at 1 meter) insures that the Compact 4.4 is capable of excellent elevated sound pressure level performance.

The Compact Series enclosures may also be used with the XT-15 Sub powered sub when additional bandwidth or high impact subwoofer program material is required. Adding the powered XT-15 Sub to any of the Compact Series will produce exceptional low frequency extension and impact.



## Specifications

### GENERAL SPECIFICATION


Type	2 Way Full Range Passive Bass Reflex
Power	50 Watt
Nominal Impedance	8 Ohm
Sensitivity (1W@1M)	85 dB
Frequency Response	80Hz – 18 kHz
Dimension (H x W x D)	230mm x 148mm x 157mm (9.0" x 5.8" x 6.1")
Finish Color	Black or White

### TRANSFORMER


Type	Isolate 15 , 25 , 35 Watt / 100 V
Direct	8 Ohm (Switchable)

### PHYSICAL INFORMATION


LF Component	4" (102 mm) Cone Speaker
HF Component	1" (25.4 mm) PEI Diaphragm
Construction	Injection Molded High Impact Polycarbonate
Grill	Powder Coated Steel Mesh
Connector	1 x Binding Post
Rigging / Fitting	Mounting "U" Bracket
Standard Packing	2 Pcs / Pack
Unit Weight	2.4 kg (5.2 lbs)
Shipping Weight	6.1 kg (13.4 lbs)
Packing Dimension HxWxD (cm)	31 x 24 x 41 (1.0 cu.ft)




TOP VIEW




BOTTOM VIEW




FRONT VIEW




BACK VIEW



SIDE VIEW



SIDE VIEW

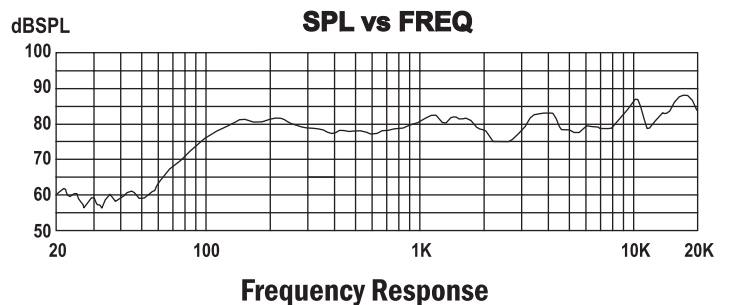

19/4,6,7 Moo 2 T.Bangkratueng A.Sampran Nakhon Pathom 73210 Thailand  
 Tel: +66-2-441-6600 Auto 30 Lines  
 e-mail: info@paudiothailand.com  
 Web site: www.paudiothailand.com  
 All rights reserved by P.Audio System Co., Ltd. 2014



## Applications

### COMPACT 5.4

The Compact 5.4 is a small format design optimized for use in reduced volume spaces where lower sound pressure levels are specified. The reduced physical dimensions of the 5.4 make it easy to integrate into cosmetic spaces and be easily hidden or mounted in small areas. The 5.25 inch (133mm) woofer and short horn loaded high frequency soft dome tweeter produce an ideal acoustic balance and excellent fidelity and smooth response.

The system features a switchable low impedance or high impedance design. The low Z configuration is an 8 ohm nominal impedance. The high Z configuration provides an industry standard 100Vrms fully isolated transformer. There are 3 available taps: 35 watts; 25 watts; and 15 watts. System power handling is a full 60 watts and the high sensitivity of 86dB (1 watt at 1 meter) insures that the Compact 5.4 is capable of excellent elevated sound pressure level performance.

The Compact 5.4 features a precision injection molded design that also includes a powder coated perforated steel grill. The system includes a U bracket to allow for easy permanent installation in a wide variety of acoustic spaces. The Compact 5.4 is available in both black and white colors.

The Compact Series enclosures may also be used with the XT-15 Sub powered sub when additional bandwidth or high impact subwoofer program material is required. Adding the powered XT-15 Sub to any of the Compact Series will produce exceptional low frequency extension and impact.



## Specifications

### GENERAL SPECIFICATION


Type	2 Way Full Range Passive Bass Reflex
Power	60 Watt
Nominal Impedance	8 Ohm
Sensitivity (1W@1M)	86 dB
Frequency Response	70Hz – 18 kHz
Dimension (H x W x D)	280mm x 186mm x 197mm (11.0" x 7.3" x 7.8")
Finish Color	Black or White

### TRANSFORMER


Type	Isolate 15 , 25 , 35 Watt / 100 V
Direct	8 Ohm (Switchable)

### PHYSICAL INFORMATION


LF Component	5.25" (133 mm) Cone Speaker
HF Component	1" (25.4 mm) Mylar Diaphragm
Construction	Injection Molded High Impact Polycarbonate
Grill	Powder Coated Steel Mesh
Connector	1 x Binding Post
Rigging / Fitting	Mounting "U" Bracket
Standard Packing	2 Pcs / Pack
Unit Weight	2.9 kg (6.3 lbs)
Shipping Weight	7.0 kg (15.4 lbs)
Packing Dimension HxWxD (cm)	38 x 28 x 48 (1.8 cu.ft)




TOP VIEW




BOTTOM VIEW




FRONT VIEW




BACK VIEW



SIDE VIEW



SIDE VIEW

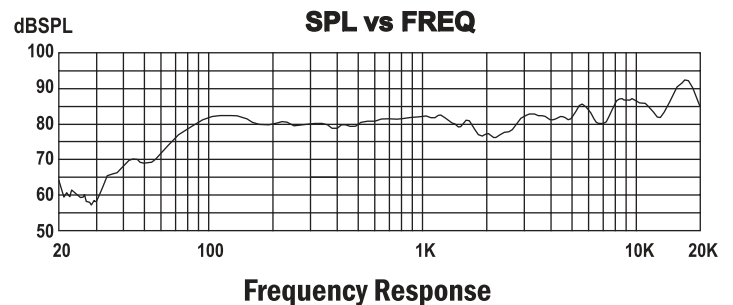

19/4,6,7 Moo 2 T.Bangkratuek A.Sampran Nakhon Pathom 73210 Thailand  
 Tel: +66-2-441-6600 Auto 30 Lines  
 e-mail: info@paudiothailand.com  
 Web site: www.paudiothailand.com  
 All rights reserved by P.Audio System Co., Ltd. 2014



## Applications

### COMPACT 6.4

The Compact 6.4 is a medium format foreground/background design that offers a smaller size and a 6 inch (152mm) woofer. The long throw design of the woofer insures extended bandwidth and controlled low frequency response. The design, like all Compact Series enclosures, is very cosmetic and blends in well in a wide variety of architectural spaces. The Compact 6.4 design is well suited for retail and public spaces where both background music and paging are required.

The system features a switchable low impedance or high impedance design. The low Z configuration is an 8 ohm nominal impedance. The high Z configuration provides an industry standard 100Vrms fully isolated transformer. There are 3 available taps: 35 watts; 25 watts; and 15 watts. System power handling is a full 80 watts and the high sensitivity of 89dB (1 watt at 1 meter) insures that the Compact 6.4 is capable of excellent elevated sound pressure level performance.

The Compact 6.4 features a precision injection molded design that also includes a powder coated perforated steel grill. The system includes a U bracket to allow for easy permanent installation in a wide variety of acoustic spaces. The Compact 6.4 is available in both black and white colors.

The Compact Series enclosures may also be used with the XT-15 Sub powered sub when additional bandwidth or high impact subwoofer program material is required. Adding the powered XT-15 Sub to any of the Compact Series will produce exceptional low frequency extension and impact.





## Specifications

### GENERAL SPECIFICATION


Type	2 Way Full Range Passive Bass Reflex
Power	80 Watt
Nominal Impedance	8 Ohm
Sensitivity (1W@1M)	89 dB
Frequency Response	50Hz – 18 kHz
Dimension (H x W x D)	350mm x 230mm x 248mm (13.7" x 9.0" x 9.76")
Finish Color	Black or White

### TRANSFORMER


Type	Isolate 15 , 25 , 35 Watt / 100 V
Direct	8 Ohm (Switchable)

### PHYSICAL INFORMATION


LF Component	6" (152 mm) Cone Speaker
HF Component	1" (25.4 mm) Silk Diaphragm
Construction	Injection Molded High Impact Polycarbonate
Grill	Powder Coated Steel Mesh
Connector	1 x Binding Post
Rigging / Fitting	Mounting "U" Bracket
Standard Packing	2 Pcs / Pack
Unit Weight	4.1 kg (9.0 lbs)
Shipping Weight	10.3 kg (22.6 lbs)
Packing Dimension HxWxD (cm)	45 x 33 x 60 (3.2 cu.ft)




TOP VIEW




BOTTOM VIEW




FRONT VIEW




BACK VIEW



SIDE VIEW



SIDE VIEW

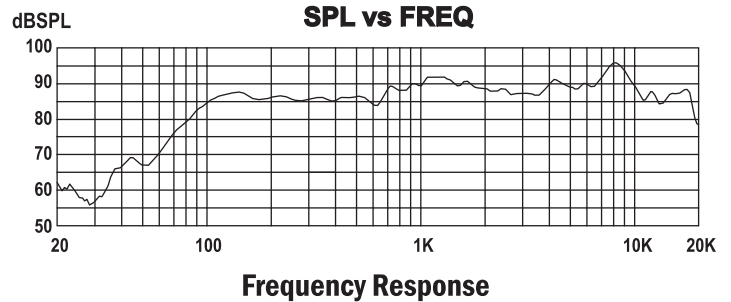

19/4,6,7 Moo 2 T.Bangkratuek A.Sampran Nakhon Pathom 73210 Thailand  
 Tel: +66-2-441-6600 Auto 30 Lines  
 e-mail: info@paudiothailand.com  
 Web site: www.paudiothailand.com  
 All rights reserved by P.Audio System Co., Ltd. 2014



## Applications

### COMPACT 8.4

The Compact 8.4 is a high performance large format foreground and background sound reinforcement system designed for permanent installation in a wide variety of acoustic environments. The design features an 8 inch (203mm) high output woofer and a short horn loaded 1 inch (25.4mm) soft dome tweeter. The extended low frequency response makes the Compact 8.4 ideally suited for retail spaces where high energy music playback is specified. The system is also excellent for larger fitness centers and workout rooms where amplified music supports verbal instruction. The Compact 8.4 presents a very cosmetic design and integrates well into upscale restaurant and pub environments where themed music is a part of the overall experience.

The system features a switchable low impedance or high impedance design. The low Z configuration is an 8 ohm nominal impedance. The high Z configuration provides an industry standard 100Vrms fully isolated transformer. There are 3 available taps: 35 watts; 25 watts; and 15 watts. System power handling is a full 100 watts and the high sensitivity of 89dB (1 watt at 1 meter) insures that the Compact 8.4 is capable of excellent elevated sound pressure level performance.

The Compact 8.4 features a precision injection molded design that also includes a powder coated perforated steel grill. The system includes a U bracket to allow for easy permanent installation in a wide variety of acoustic spaces. The Compact 8.4 is available in both black and white colors.

The Compact Series enclosures may also be used with the XT-15 Sub powered sub when additional bandwidth or high impact subwoofer program material is required. Adding the powered XT-15 Sub to any of the Compact Series will produce exceptional low frequency extension and impact.



## Specifications

### GENERAL SPECIFICATION


Type	2 Way Full Range Passive Bass Reflex
Power	100 Watt
Nominal Impedance	8 Ohm
Sensitivity (1W@1M)	89 dB
Frequency Response	40Hz – 18 kHz
Dimension (H x W x D)	374mm x 265mm x 302mm (14.7" x 10.4" x 11.9")
Finish Color	Black or White

### TRANSFORMER


Type	Isolate 15 , 25 , 35 Watt / 100 V
Direct	8 Ohm (Switchable)

### PHYSICAL INFORMATION


LF Component	8" (203 mm) Cone Speaker
HF Component	1" (25.4 mm) Silk Diaphragm
Construction	Injection Molded High Impact Polycarbonate
Grill	Powder Coated Steel Mesh
Connector	1 x Binding Post
Rigging / Fitting	Mounting "U" Bracket
Standard Packing	2 Pcs / Pack
Unit Weight	5.7 kg (12.5 lbs)
Shipping Weight	13.3 kg (30.0 lbs)
Packing Dimension HxWxD (cm)	35 x 47 x 70 (4.0 cu.ft)




TOP VIEW




BOTTOM VIEW




FRONT VIEW




BACK VIEW



SIDE VIEW



SIDE VIEW

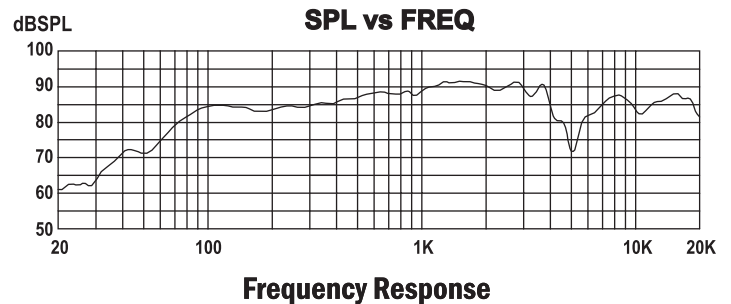

19/4,6,7 Moo 2 T.Bangkratuak A.Sampran Nakhon Pathom 73210 Thailand  
 Tel: +66-2-441-6600 Auto 30 Lines  
 e-mail: info@paudiothailand.com  
 Web site: www.paudiothailand.com  
 All rights reserved by P.Audio System Co., Ltd. 2014

