

Applications

Gallardo 4

The P Audio Gallardo-4 is a small format high performance sound reinforcement system designed for high quality foreground and background music applications. The Gallardo-4 is designed for both indoor and outdoor applications where music and speech reinforcement is specified. The system is ideal for use in restaurants, retail environments, bars, hotels, and other applications where high quality music systems are specified.

The Gallardo-4 utilizes a two element array of high output 4 inch (101.6mm) woofers. The horn loaded high frequency wave guide is positioned between the two element arrays to insure coherent and balanced high frequency response. Polar lobing is controlled by this geometry and produces a properly aimed response at the crossover frequency.

The Gallardo-4 features a standard multi-tap transformer input that is switch able from a maximum of 50 watts of input power in essentially 3dB steps. The available taps are 50 watts, 25 watts, 12 watts and 5 watts. The Gallardo-4 may also be easily configured for a standard low impedance direct input.

The system also features a standard mounting bracket designed for flexible aiming and easy installation. The small physical size and unique appearance of the Gallardo-4 make it an ideal installation product. It is very versatile and combines great sound with great looks.

Features and Benefits

High Sensitivity

Indoor/Outdoor Weather Resistant

Two Element Low Frequency Array

Multi-Tap Matching Transformer Standard

Mounting Bracket Included

Neodymium Based High Frequency Driver



Specifications

GENERAL SPECIFICATION


Type	3 Way Full Range Passive Bass Reflex
Power	50 Watt
Nominal Impedance	4 Ohm
Sensitivity (1W@1M)	87 dB
Frequency Response	80Hz – 18 kHz
Dimension (H x W x D)	303mm x 157mm x 267mm (11.9" x 6.2" x 10.5")
Finish Color	Black or White

TRANSFORMER


Type	Isolate 5 , 12 , 25 , 50 Watt / 100 V
Direct	4 Ohm (Switchable)

PHYSICAL INFORMATION


LF Component	2 x 4" (101.6 mm) Cone Speaker
HF Component	1 x 1" (25.4 mm) Titanium Diaphragm
Construction	Injection Molded High Impact Polycarbonate
Grill	Powder Coated Steel Mesh
Connector	1 x Push Terminal
Rigging / Fitting	Universal Supports
Standard Packing	2 Pcs / Pack
Unit Weight	5 kg (11.0 lbs)
Shipping Weight	11.2 kg (24.6 lbs)
Packing Dimension HxWxD (cm)	350 x 465 x 305 13.8" x 18.3" x 12.0" (1.75 cu.ft)




TOP VIEW




BOTTOM VIEW




FRONT VIEW




BACK VIEW



SIDE VIEW



SIDE VIEW

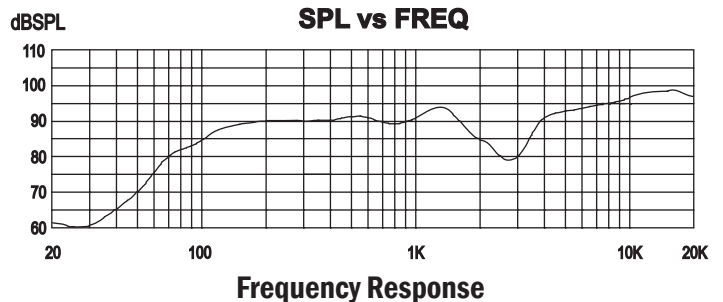

19/4 Moo 2 T.Bangkratuk A. Samparn Nakornpathom 73210 Thailand
 Tel: +66-2-441-6600 Auto 30 Lines
 e-mail: info@paudiothailand.com
 Web site: www.paudiothailand.com
 All rights reserved by P.Audio System Co., Ltd. 2007

