



Features

- 4" Large Format Voice Coil
- 2000 Watts Peak Power Handling
- Active Balanced Cooling
- Neodymium Magnetics
- Precision Rectangular Ribbon Wire Geometry
- Die Cast Aluminum Chassis

Applications

The P.Audio C12-500N is a high performance wide bandwidth transducer. The C12-500N is an upgraded design that features many of P.Audio's new technologies and performance upgrades. The 12 inch (305mm) diameter piston will produce extremely high sound pressure levels in the mid band and upper mid frequencies and is ideal for high level response in both live sound and recorded music venues. The transducer uses high energy ferrite magnetics to achieve a very high acoustic output to weight ratio. The C12-500N has been optimized for use in two way or three way sound reinforcement systems. The transducer is also ideal as a mid bass driver for ultra high performance system designs and has an operating bandwidth of 45Hz to 3000Hz.

The C12-500N features a very large 4 inch (99.3mm) diameter voice coil that provides an AES rated 400 watts of continuous power handling and a full 2000 watts of peak rated power handling when sufficient amplifier headroom is available. The C12-500N utilizes P.Audio's Auto Balanced Cooling (ABC) technology to not only improve transducer power handling and reliability but to also increase power compression performance by carefully balancing and directing airflow to critical areas.

The voice coil design is a bobbin wound geometry with P.Audio's ribbon rectangular wire technology to improve conversion efficiency and provide a large cross-sectional area for superior cooling.

The transducer chassis is a die cast aluminum design that insures a very high degree of structural integrity.

Specifications

General Specifications

Nominal diameter.....	305 mm/12 in
Power rating.....	500 W(AES)
Nominal impedance.....	8Ω
Sensitivity.....	98 dB
Frequency range.....	45-3000 Hz
Chassis type.....	Cast aluminum
Magnet type.....	Neodymium
Magnet weight.....	10.8 oz
Voice coil diameter.....	99.3 mm/4 in
Coil material.....	Aluminum wire
Cone material.....	Pulp Paper
Surround material.....	Treated Cloth
X-max.....	3.5 mm
Gap depth.....	10 mm

Thiele Small Parameters


FS.....	45.4 Hz
Re.....	6.8Ω
Qms.....	4.690
Qes.....	0.288
Qts.....	0.271
Mms.....	67.11 g
Vas.....	78.87 lt
Sd.....	0.551 sqm
Bl.....	21.28 Tm
Le (at 1kHz).....	0.62 mH

Packing Dimensions

WxDxH (mm).....	365 x 365 x 200
-----------------	-----------------

Weight

Net Weight.....	6.29 kg
Shipping Weight.....	7.64 kg

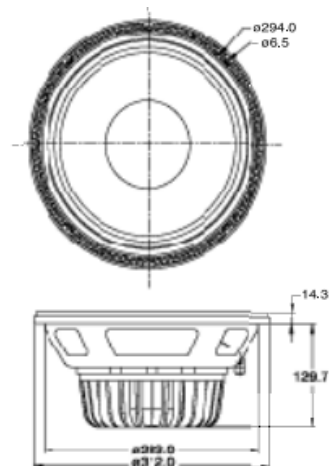

Frequency Response & Impedance Curve

