


7310



SINCE 1991
The Ultimate Loudspeaker

KEY FEATURES:

- Two Way Surround Loudspeaker System
- 90°X60° Coverage Pattern
- Low Distortion High Frequency Horn Design
- 10" High Power Output Mid-Low Frequency Transducer
- 1" Compression High Frequency Driver
- 15mm High Density Cabinet

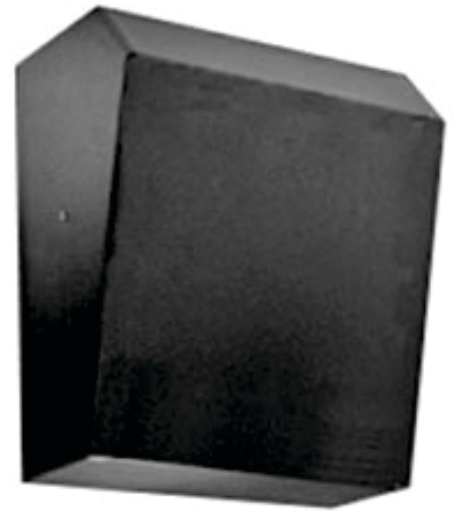

TECHNICAL SPECIFICATION:

Freq.Range (-10dB):	60Hz~19kHz
Freq.Response (-3dB):	65Hz~18kHz
Rated System Power:	150W(RSM)/600W(Peak)
Horizontal Coverage:	90°
Vertical Coverage:	60°
Axial Sensitivity:	95dB
Max Calculated SPL:	123dB
Nominal Impedance:	8 ohm
Crossover Frequency:	3500Hz
LF Transducer:	10" /50mm
HF Transducer:	1" /25mm
Connector:	Spring Clipper
Dim(W×H×D):	450×500×260 mm
Net Weight:	14 kg
Shipping Weight:	16 kg

